FN8108W-B4 8CH 2K/3MP WIFI NVR KITS

Protect your home in all directions

8CH

8 CH Live Preview & Record

8 CH Synchronous Playback

Human Detection

MESH

Further & Wider Network Coverage

Plug & Play

IP66 Weatherproof

Model	FN8108W-B4
Appearance	Optional
Video Input	8 Channels IP camera input
Playback	8 channels synchronous video playback
Resolution	Up to 8MP per channel (8ch@8MP)
Video Compression	H.264+
Capacity	Up to 8TB
Display Resolution	Support Max. 4K Monitor
Detection	Human Detection
Night Vision	65ft / 20m Night Vision
Storage Temperature	-20°C~60°C(-4°F~140°F)
Operating System	Microsoft Windows (Foscam VMS), MacOS (Foscam VMS), Android (Foscam app), iOS (Foscam app)

Appearance Accessories

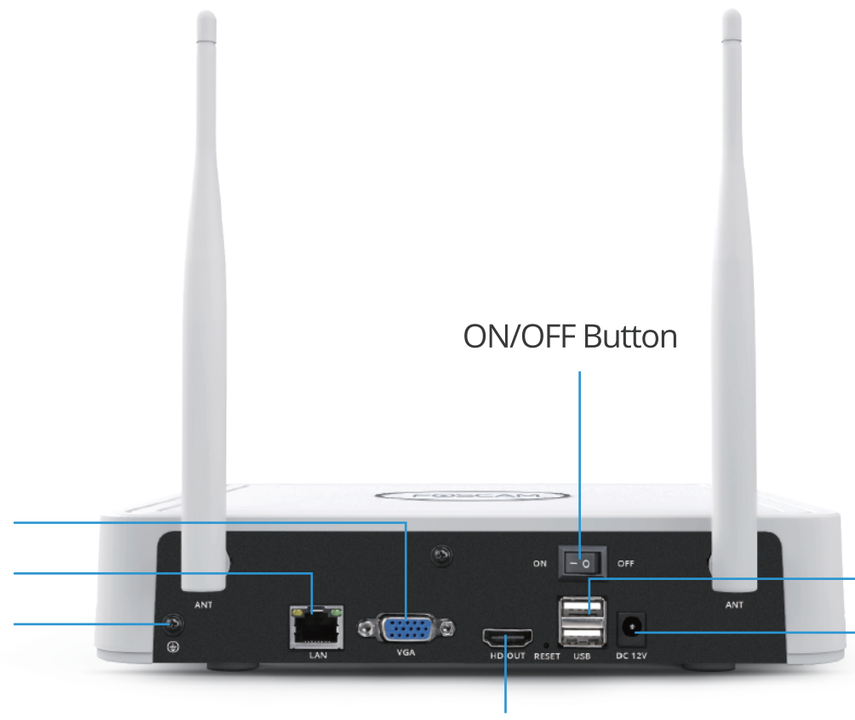

Where it can be used

The NVR can be paired with cameras that can be positioned in the home yard, front porch, driveway, garden, or other environments.

Specification

ITEMS		FN8108W
Video Input	IP Video Input	8 Channels IP camera input
Video Output	HDMI Output	1×HDMI
	VGA Output	1×VGA
	Display Resolution	3840x2160, 2560x1440,1920×1080, 1440×900, 1280×1024, 1280×800, 1280×720, 1024×768；
Recording	Recording Resolution	Up to 8MP per channel (8ch@8MP)
	Record Mode	Time Scheduled / Human Detect
	Compression Format	H.264+
Playback	Synchronous Playback	8 channels synchronous video playback
	Playback Mode	Pause / Stop / Slow / Fast/ Frame Play
Network	Ethernet	One 10/100Mbps RJ45 port
	Mesh	Mesh state management
	Wireless Standard	IEEE802.11b/g/n
	Wireless Security	WPA, WPA2
	Network Protocol	IP, TCP, UDP, SMTP, DHCP
HDD	Capacity	Up to 8TB
External Interface	Network Interface	1× 10/100 Mbps RJ45 port
	USB Interface	2× USB2.0 interface for mouse and external storage
	Button	1× Reset button
Software	Smart Phone	iOS,Android,3G/4G/5G Smartphones
Language	Language	20 languages
Physical and Environmental	Power Supply	DC 12V/2A
	Dimension(LxWxH)	234mm*234mm*52mm
	Net Weight (g)	660g
	Operating Temperature	0°C ~ 50°C (32°F ~ 122°F)
	Operating Humidity	20% ~ 85% non-condensing
	Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
	Storage Humidity	0% ~ 90% non-condensing

ITEMS		FI9911W
Image Sensor	Sensor Type	High Definition Color CMOS Sensor
	Video Quality	3.0Megapixels (2304*1296)
	Backlight Compensation	√
Lens	Lens Type	f: 4mm;F: 2.0
	IR Range	65ft(20m)
	Infrared Mode	Automatic
	Diagonal View Angle	94°
Network	Mesh	Each IPC as a WiFi relay
	Wireless Standard	IEEE802.11b/g/n
	Data Rate	IEEE802.11b: 11Mbps(Max.); IEEE802.11g: 54Mbps(Max.); IEEE802.11n: 150Mbps(Max.).
	Wireless Security	WPA, WPA2
	Network Protocol	IP, TCP, UDP, NTP, DHCP
System Requirements	Operating System	Microsoft Windows (Foscam VMS), MacOS (Foscam VMS), Android (Foscam app), iOS (Foscam app)
	Smart Phone	iOS,Android,3G/4G/5G Smartphones
Software Features	Video Format	H.264+
	Multi-Stream	Dual streams
	Human Detection	√
	Day/Night	√
Physical and Environmental	Waterproof	IP66
	Net Weight	370g
	Power	DC12V
	Power Consumption	<5W
	Dimension(LxWxH)	97(L)x67 (W)x64 (H)
	Certification	FCC, CE, IP66
	Operating Temperature	-10°C~ 55°C (14°F ~ 140°F)
	Operating Humidity	10% ~ 80% non-condensing
	Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
	Storage Humidity	0% ~ 90% non-condensing

* Product specifications are for reference only and could be subject to change without prior notice.

Shenzhen Foscam Intelligent Technology Co., Ltd.
Room 902, Building 1B, Shenzhen International Innovation Valley,
Xingke 1st Street, Nanshan District, Shenzhen, Guangdong, China, 518055
E-mail: sales@foscam.com Website: www.foscam.com

FOSCAM®
home security