16CH 4K/8MP UHD

NETWORK VIDEO RECORDER

Protect your home in all directions

4K
8.0 Megapixel

Motion Detection

Support up to 16TB *2 HDD

PNP
Auto Connection, Plug and Play

PoE
Power over Ethernet

Free Access to Foscam APP & VMS

Model	FNA216HE
Appearance	
Video Input	16 Channels Live Preview & Record
Playback	16 Channels Synchronous Playback
Resolution	Up to 8MP per channel (16ch@8MP)
PoE Standard	IEEE 802.3at/af
Video Compression	H.264/H.264+
Storage Capacity	Up to 16TB *2 HDD
Display Resolution	Support Max. 4K Monitor
Detection	Motion Detection
Video Output	1×HDMI，1×VGA
Remote Viewing	View Remotely on Your Microsoft Windows (Foscam VMS), Mac OS (Foscam VMS), Android (Foscam app), IOS (Foscam app) for Access and Management.

Appearance Accessories

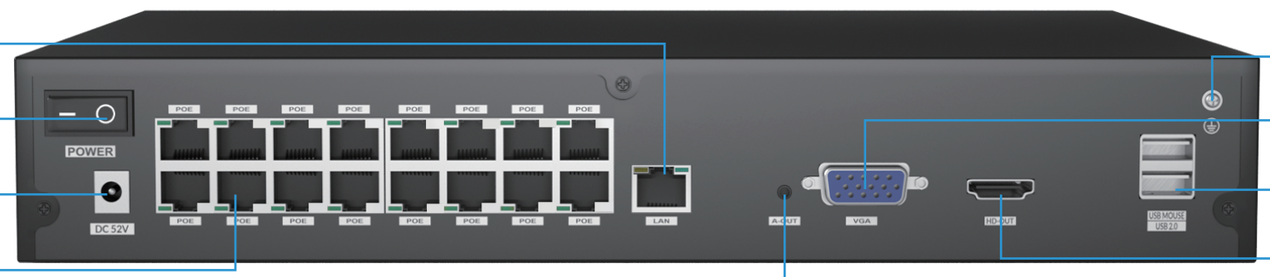

Where it can be used

An NVR can be paired with cameras, which can be positioned in home yard, front porch, driveway, garden or other environments.

Specification

ITEMS		FNA216HE
Video Input	IP Video Input	16 Channels UHD IP camera input
Video Output	HDMI Output	1×HDMI
	VGA Output	1×VGA
	Display Resolution	3840x2160，2560x1440,1920x1080,1440x900,1280x1024,1280x800, 1280x720,1024x768
Recording	Recording Resolution	Up to 8MP per channel (16ch@8MP)
	Record Mode	Time Scheduled / Motion Detect
	Compression Format	H.264/H.264+
Playback	Synchronous Playback	16 channels synchronous video playback
	Playback Mode	Pause / Stop / Slow / Fast/ Frame Play
Network	POE Standard	IEEE 802.3at/af
	Network Protocol	IP,TCP,UDP,SMTP,DHCP,RTSP
HDD	Capacity	Up to 16TB *2
External Interface	Network Interface	1× 10/100/1000 Mbps RJ45 port
	USB Interface	2× USB2.0 interface for mouse and external storage
	Button	1× Reset button
System Requirements	Operating System	Microsoft Windows (Foscam VMS), MacOS (Foscam VMS), Android (Foscam app), iOS (Foscam app)
	Smart Phone	iOS,Android,3G/4G/5G Smartphones
Language	Language	20 languages
Physical and Environmental	Power Supply	DC 52V/4A
	Dimension(LxWxH)	325mm*242mm*50mm
	Net Weight (g)	1319g
	Operating Temperature	0°C ~ 50°C (32°F ~ 122°F)
	Operating Humidity	20% ~ 85% non-condensing
	Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
	Storage Humidity	0% ~ 90% non-condensing

* Product specifications are for reference only and could be subject to change without prior notice.

Shenzhen Foscam Intelligent Technology Co., Ltd.
Room 902, Building 1B, Shenzhen International Innovation Valley,
Xingke 1st Street, Nanshan District, Shenzhen, Guangdong, China, 518055
E-mail: sales@foscam.com Website: www.foscam.com

FOSCAM®
home security