8CH 4K/8MP UHD

NETWORK VIDEO RECORDER

Protect your home in all directions

4K			PNP	H.264+	
8.0 Megapixel	Motion Detection	Support up to 16TB Hard Disk	Auto Connection, Plug and Play	H.264+	Free Access to Foscam APP&VMS

Model	FNA108H	FNA108HE
Appearance		
Video Input	8 Channels Live Preview & Record	
Playback	8 Channels Synchronous Playback	
Resolution	Up to 8MP per channel (8ch@8MP)	
PoE Standard	N/A	IEEE 802.3at/af
Video Compression	H.264+	
Storage Capacity	Support up to 16TB Hard Disk	
Display Resolution	Support Max. 4K Monitor	
Detection	Motion Detection Alarm	
VIDEO-OUT	Connect Via HDMI to HDTV	
Remote Viewing	View Remotely on Your Microsoft Windows (Foscam VMS), Mac OS (Foscam VMS), Android (Foscam app), IOS (Foscam app) for Access and Management.	

Appearance Accessories

FNA108HE

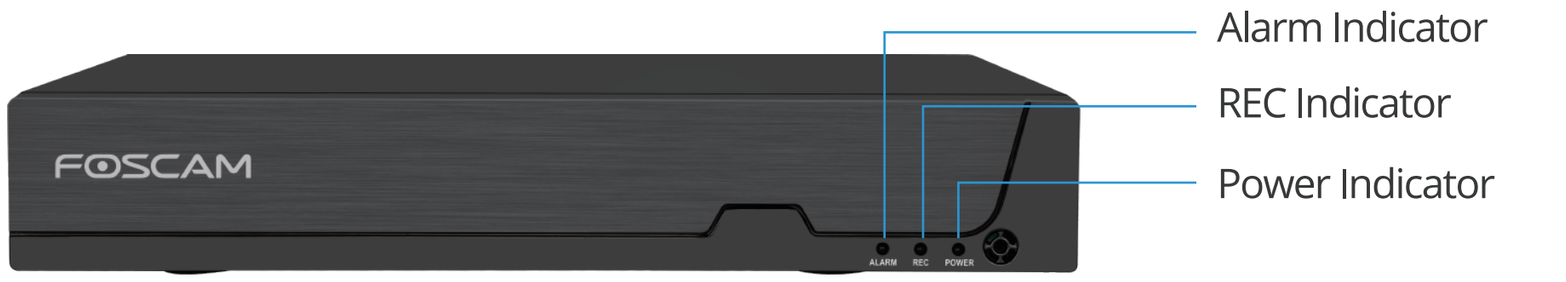

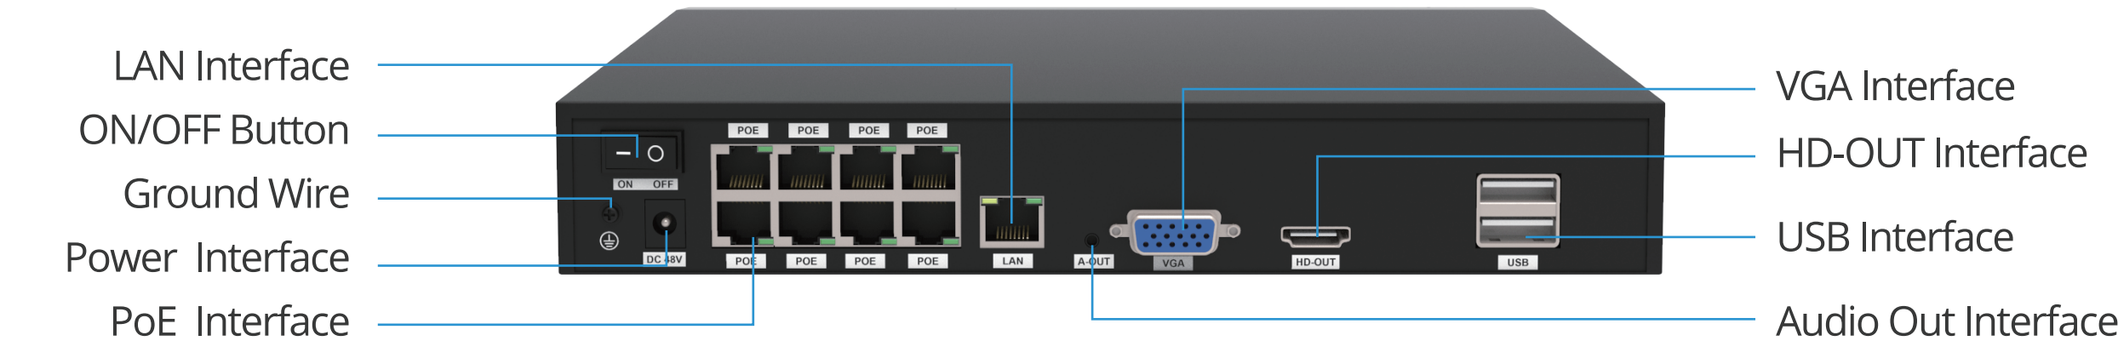

FNA108H

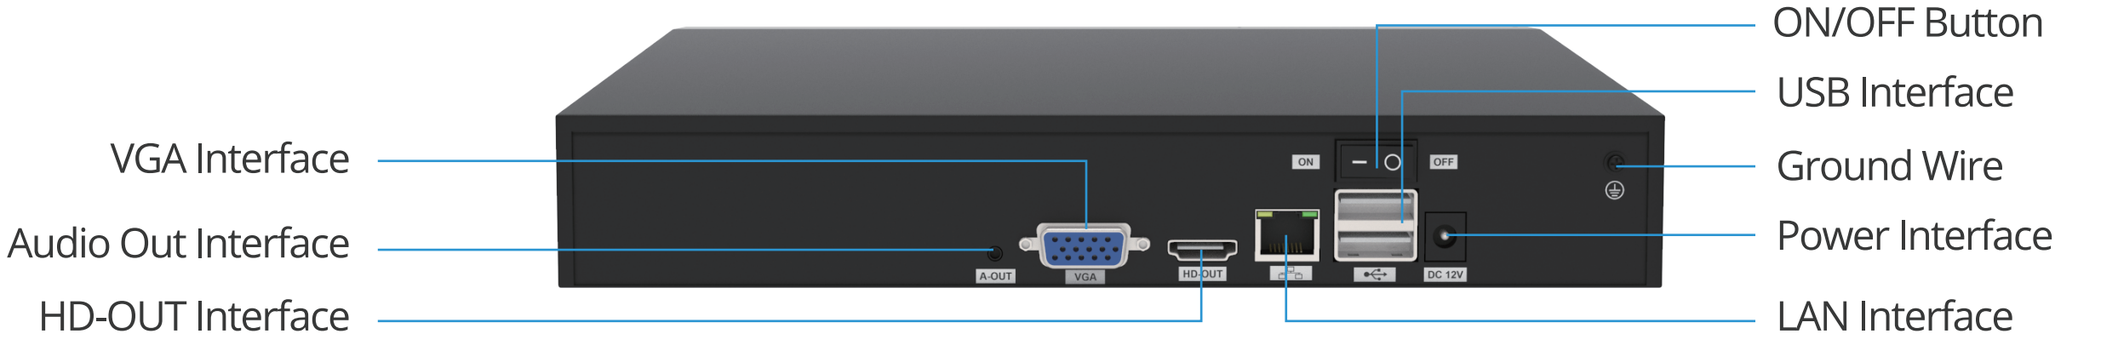

Where it can be used

An NVR can be paired with cameras, which can be positioned in home yard, front porch, driveway, garden or other environments.

Specification

ITEMS		FNA108H / FNA108HE
Video Input	IP Video Input	8 Channels UHD IP camera input
Video Output	HDMI Output	1×HDMI
	VGA Output	1×VGA
	Display Resolution	3840x2160, 2560x1440,1920x1080,1440x900,1280x1024,1280x800, 1280x720,1024x768
Recording	Recording Resolution	Up to 8MP per channel (8ch@8MP)
	Record Mode	Time Scheduled / Motion Detect
	Compression Format	H.264/H.264+
Playback	Synchronous Playback	8 channels synchronous video playback
	Playback Mode	Pause / Stop / Slow / Fast/ Frame Play
Network	Ethernet	One 10/100Mbps RJ45 port
	Network Protocol	IP, TCP, UDP, SMTP, DHCP, RTSP
HDD	Capacity	Up to 16TB
External Interface	Network Interface	1× 10/100/1000 Mbps RJ45 port (FNA108H) 1× 10/100 Mbps RJ45 port (FNA108HE)
	USB Interface	2× USB2.0 interface for mouse and external storage
	Button	1× Power on/off button,1× Reset button
System Requirements	Operating System	Microsoft Windows (Foscam VMS), MacOS (Foscam VMS), Android (Foscam app),iOS (Foscam app)
	Smart Phone	iOS,Android,3G/4G/5G Smartphones
Language	Language	20 languages
Physical and Environmental	Power Supply	DC 48V/2A (FNA108HE) / DC 12V/2A (FNA108H)
	Dimension(LxWxH)	255mm*238mm*50mm
	Net Weight (g)	880g (FNA108HE) / 780g (FNA108H)
	Operating Temperature	0°C ~ 50°C (32°F ~ 122°F)
	Operating Humidity	20% ~ 85% non-condensing
	Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
	Storage Humidity	0% ~ 90% non-condensing

* Product specifications are for reference only and could be subject to change without prior notice.

Shenzhen Foscam Intelligent Technology Co., Ltd.
Room 902, Building 1B, Shenzhen International Innovation Valley,
Xingke 1st Street, Nanshan District, Shenzhen, Guangdong, China, 518055
E-mail: sales@foscam.com Website: www.foscam.com